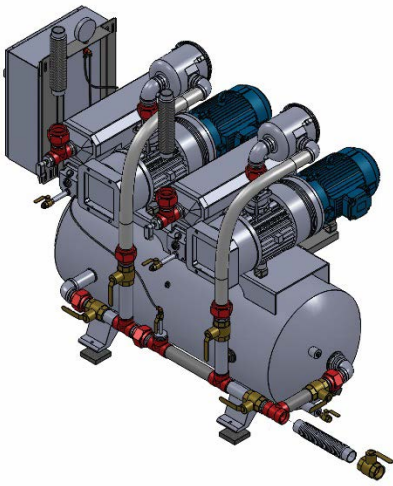


S1000B-T2-H120 Rotary Vane Vacuum System

	Configuration:	DuplexHorizontal Tank Mount
	System Capacity:	71 SCFM @ 19" Hg. 32.3 SCFM @ 25" Hg.
	Capacity per Pump:	71 SCFM @ 19" Hg.
	Motor Horsepower:	10 HP
	Total System Horsepower:	20 HP
	Receiver Size:	120 Gallons
	Available Voltage:	208/230/460 3 phase Contact Factory for Other Voltages
	Note: System capacity is stated with one pump in reserve	

Vacuum Pump Module:

- Oil sealed, air cooled rotary vane vacuum pumps
- Sealed with synthetic oil for heat resistance and long life
- Each pump has: integral anti-suck back valve, vacuum filter, inlet check valve and exhaust temperature switch
- Pump isolation valve for ease of service

Air Receiver:

- Constructed to ASME standards
- Rated for full vacuum
- Equipped with 3 valve bypass
- High visibility vacuum gauge
- Source isolation valve included
- Mounting pads and flex connectors included

System Controls:

- Underwriters Laboratories listed
- Nema 12 enclosure
- Safety disconnect handle
- Fuseless design
- HMI (human machine interface system)
- NFPA required local alarms/ remote monitoring

Options:

- Inlet liquid separator
- Liquid cooling system